

VTK-JK-3222-IP

MARCA: VIDEOTRONIK

2MP IPC Series PTZ Dome



Camera

Image Sensor	1/2.9" SONY Low Illumination 2.1MP CMOS Sensor
Horizontal Resolution	2MP
Compression	H.265/H.264
S/N Ratio	>50db

PTZ



Horizontal Rotation Speed	220°/S
---------------------------	--------

Horizontal Rotation Range	0°~360°
Tilt Rotation Speed	30°/s
Tilt Rotation Range	0°~90°
Preset Points	220
Guard Tours	8 groups
Guard Points	Max.32 points
Lens	
Focus Length	3.9mm-85.5mm
Focus Control	22X Optical Zoom
Night Vision	
Infrared LED	φ 42x8PCS

IR Range	120m
Day-night mode	AUTO
Network	
Network protocol	TCP/IP, HTTP, FTP, RTSP, UPnP, DNS, NTP, RTP, UDP, IGMP, P2P
ONVIF	Support
Network interface	Built-in RJ45 network interface, support 10M/100M IP DATA
Interface	
Audio	/
Alarm	/
General	
Weatherproof	IP66

Operating Temperature	Indoor: 0°~ +40° Outdoor: -40°~ +60°
Operating Humidity	≤90% Non Condensing
Heater & Blower	Auto temperature control
Power	DC12V/4A
Lightning Protection	Transient voltage 3000V
Dimension	26.5x26.5x42(cm)
Weight	9.7Kgs

DRAWINGS

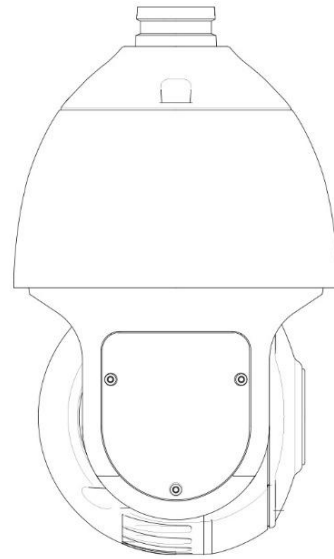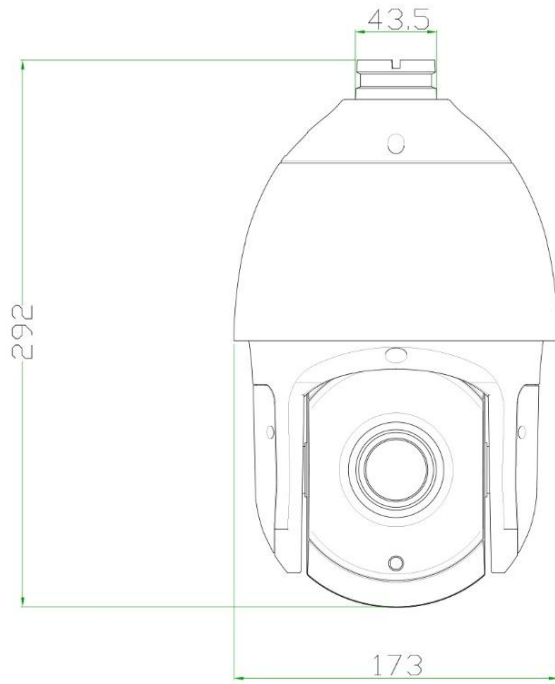

PICTURES

